


Battery Specification Sheet MC-31

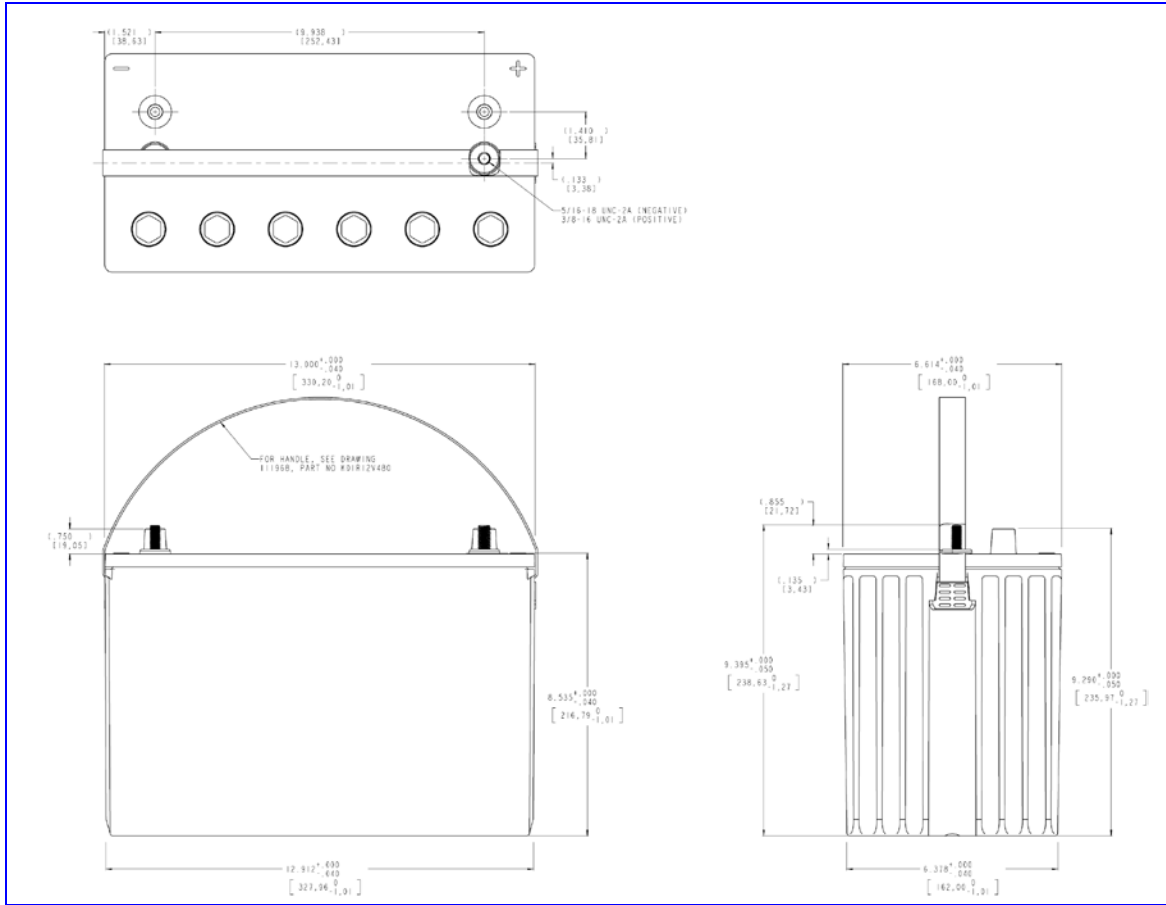

BCI Group Size	31
Nominal Voltage	12 V
Length	330 mm / 13.0 "
Width	168 mm / 6.6 "
Height to cover	217 mm / 8.5 "
Total height	239 mm / 9.4 "
Approximate weight	32.7 kg / 72.0 lb
Handle Option	Yes
SAE CCA (-18°C / 0°F)	700 A
SAE CA (0°C / 32°F)	840 A
SAE RC (27°C / 80°F)	200 Min
Ref. Ah Capacity 20HR	100 Ah
Float voltage (27°C / 80°F)	13.5 - 13.8 V
Cycling voltage (27°C / 80°F)	14.1 - 14.4 V
Maximum discharge current	1400 A (5s)
Battery terminal type	1:9 SAE Post 3/8" - 16 Positive Stud 5/16" - 18 Negative Stud
Electrolyte specific gravity range	1.300 - 1.320
Separator material	AGM - Absorbed Glass Mat
Battery container material	Polypropylene
Battery cover material	Polypropylene
Battery type	AGM - Absorbed Glass Mat
Positive grid alloy	Lead Calcium
Negative grid alloy	Lead Calcium

The purpose of this specification sheet is to assist in the selection of batteries. This information is published as a general guide to the public. Design, features and specifications are subject to change without notice. We disclaim any representation or warranty, express or implied, concerning the specification sheet or recommendations, and in no event shall be liable for any loss or damage claimed to have arisen as a result of the use of this specification sheet.