


Ultra Wide Lens Camera

P7-WIDE-TURBO



Key features

- 1.27 Megapixel high-performance CMOS
- Analog HD output, up to 720P resolution
- Low illumination
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- IP66 weatherproof
- Up the Coax(HIKVISION-C, Pelco-C Protocol)

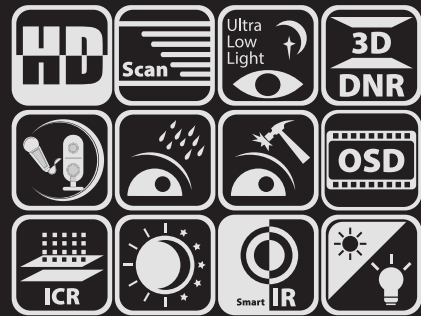

P7-WIDE-TURBOW**Camera**

Image Sensor	1.27 MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1305 (H) *977 (V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter time	1/25(1/30)s to 1/50,000s
Lens:	1 Angel of view: 115°(2.1mm)
Lens Mount	M12
Day& Night	ICR
Angle Adjustment	Pan:35°, Tilt:43.533.5°, Rotation: 30°
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75ff/BNC)
Audio Input	Built-in Mic
Audio Output	1-ch BNC audio interface (line level, 1kff)
S/N Ratio	62dB

Menu

Auto Gain	Support
D/N Mode	Auto/Color/BW
White Balance	Auto/Manual
Private Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
Language	English/Chinese
Function	3D DNR Digital Zoom Slow Shutter(16X) Mirror

General

Operating Conditions	-30 ~65 (-22 °F ~ 149 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC315%
Power Consumption	Max. 4 W
Protection Level	IP66
Impact protection	IK10
IR Range	10-20 m
Communication	Up the coax, Protocol: Pelco-C(CVBS output), C(TVI output)
Dimensions	239.8 39.7 mm (9.44 1.56)
Weight	1100g